

Ring Waist Hip Pouch NotAFannyPack Tutorial

Construction based off [Pink Peony Bag on Craftsy by Charmed Liebling](#)

All pattern pieces include 3/8" seam allowance

Body - Back

10" x 5.25"

Cut 1 from bottomweight **outer** fabric
(optional: line with fusible interfacing)

Cut 1 from **lining** fabric

Flap

10" x 6.75"

Cut 2 from bottomweight outer fabric
(optional: line with fusible interfacing)

Mark 1.5" up from bottom
edge and 1.5" in from each
side to place closure
on inside flap

Body - Front

13" x 6.75"

Cut 1 from bottomweight **outer** fabric
(optional: line with fusible interfacing)

Cut 1 from **lining** fabric

Mark 2.5" up from bottom
edge and 3.5" in from each
side to place closure
on "outer" fabric

Corner cutouts:
1.5" x 1.5" from bottom
corners

Color Guide:

Pink: Outer Fabric (Body)

Light Blue: Liner Fabric (Body)

Green: Flap

Dark Blue: Straps

Also needed:


Ring Strap: 10" by 30" of bottomweight fabric

Long Strap: 10" by 30"-45" of bottomweight fabric


2 small (2") sling rings or 2" d-rings.

2 closures (hook and loop tape, snaps, or magnetic clasps)

1) Fold **ring strap** lengthwise, right sides together, and sew along open edge to close it into a tube (A). Turn right side out and press flat (B). Fold the edges in to the center lengthwise, like a trifold board, and press flat (C). Thread both sling rings (or d-rings, or female buckle end) onto the now- 3" wide strap, and fold it in half so that the raw ends are together and the rings are at the center of the strap (D). Pin the ends together.

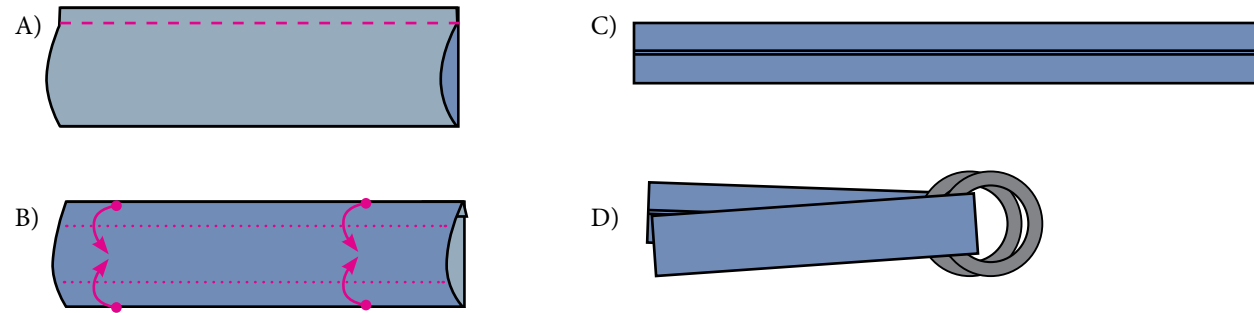

2) Hem the two long edges and one short edge of the **long strap**. Pleat the raw, unhemmed end of this strap to also be 3" wide. Press flat and pin pleats in place.

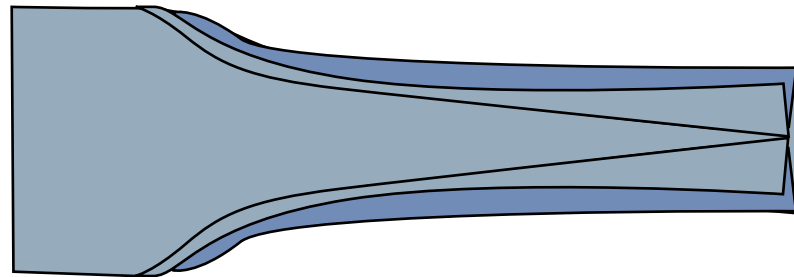


Cross Section of Pleats:




3) Attach hook & loop tape, snaps, magnetic clasps or another closure to the marked points on **Body - Front (outer)** and one of the **Flap** pieces.

4) With the fabric right side up, fold the top left corner of **each Body - Front** piece down to the bottom edge, so the two edges of the corner cutout line up. Sew a straight line along the edge of the cutout. Repeat for both corner cutouts of both **Body - Front (outer)** and **Body - Front (liner)**.

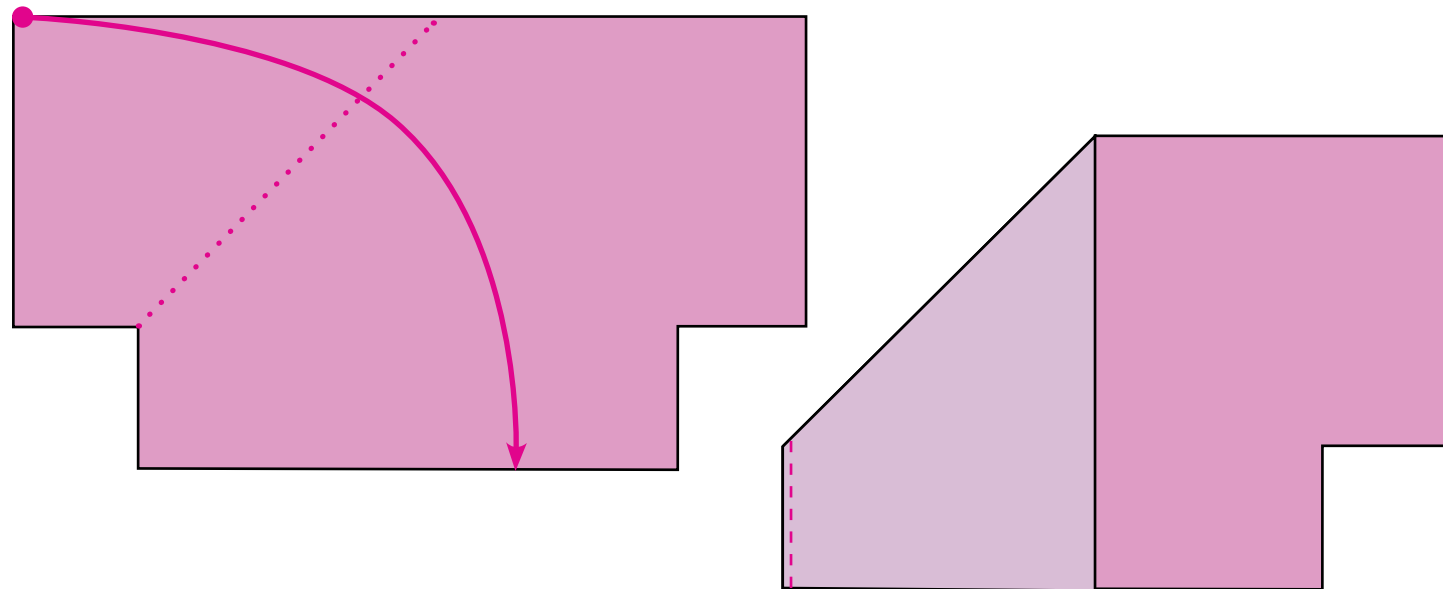


5) Line up **Body - Front (lining)** and **Body - Back (lining)** with right sides together. Pin the edges, and sew together along the sides and around the corners. Leave the entire top edge open, as well as a 6" hole in the bottom edge.

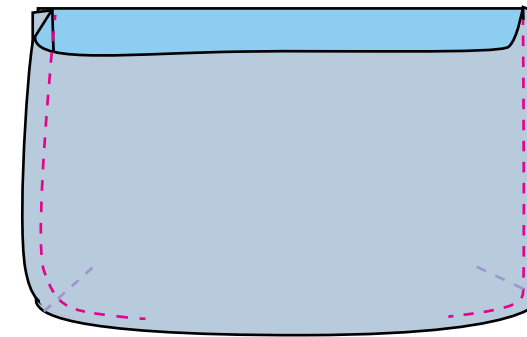

6) Line up **Body - Front (outer)** and **Body - Back (outer)** right sides together. Insert the raw ends of the **ring strap** in between the **two layers** on the left side, 1" from the top edge, with the **strap** and rings inside the **pouch** (touching the "right sides" of the fabric.)

Insert the raw ends of the **long strap** in between the two layers on the right side, 1" from the top edge, with the strap inside the pouch (touching the "right sides" of the fabric.) The "right side" of the **long strap** should be facing the right side of **Body - Front (outer)**.

Pin edges carefully. Sew along the sides and bottom edge. Leave the top edge open. Reinforce the straps by sewing an additional tight zigzag along the raw edge of the **straps** through the seam allowance of the **Body pieces**.

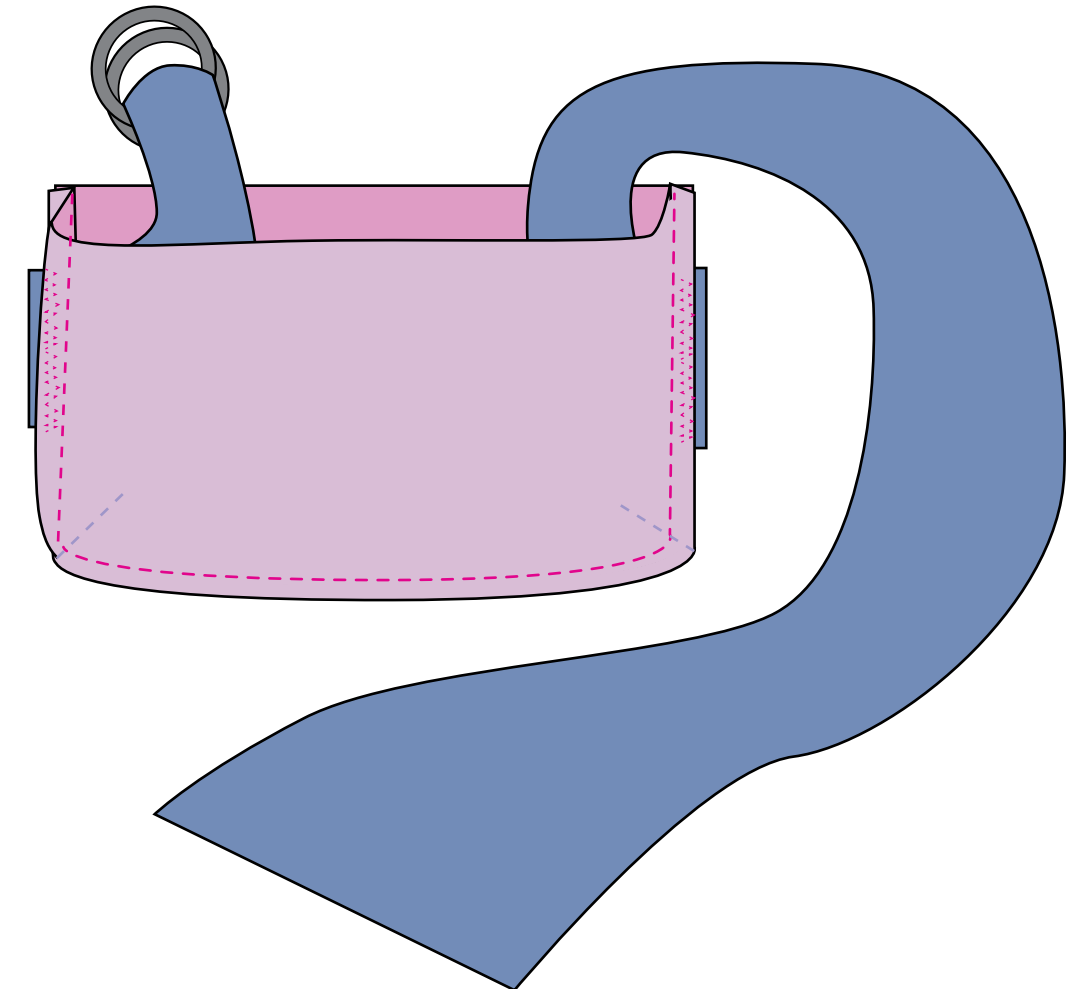


7) Line up both **Flap pieces** right-side together and sew along the sides and bottom edge (the edge with the closures.) Turn right-side-out, press flap, and topstitch along the outside edges of the sides and bottom.


8) Turn **Body (outer)** right side out (it should look like a right-side-out pouch with straps coming out of each side.) Position the **Flap** upside down (closures on the bottom facing out) with the raw open edge lined up with the raw edge of **Body - Back (outer)**. The opposing closures on **Body - Front (outer)** should be facing out on the bottom front.

Sew close to the edge, joining the top of **Body - Back (outer)** and both **Flap** pieces.

Back View:

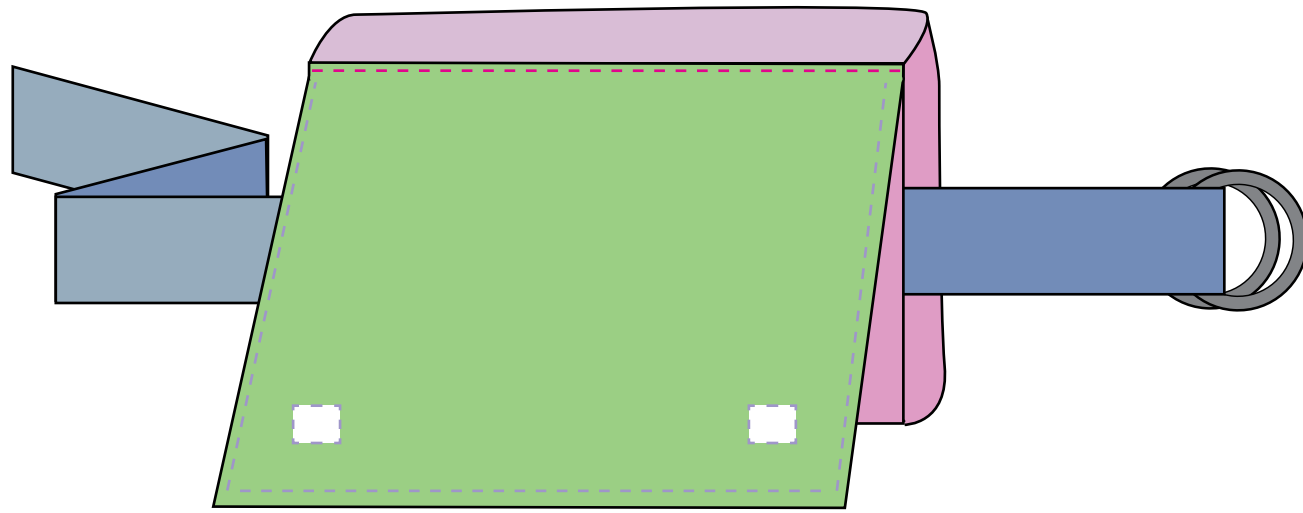


Front View:

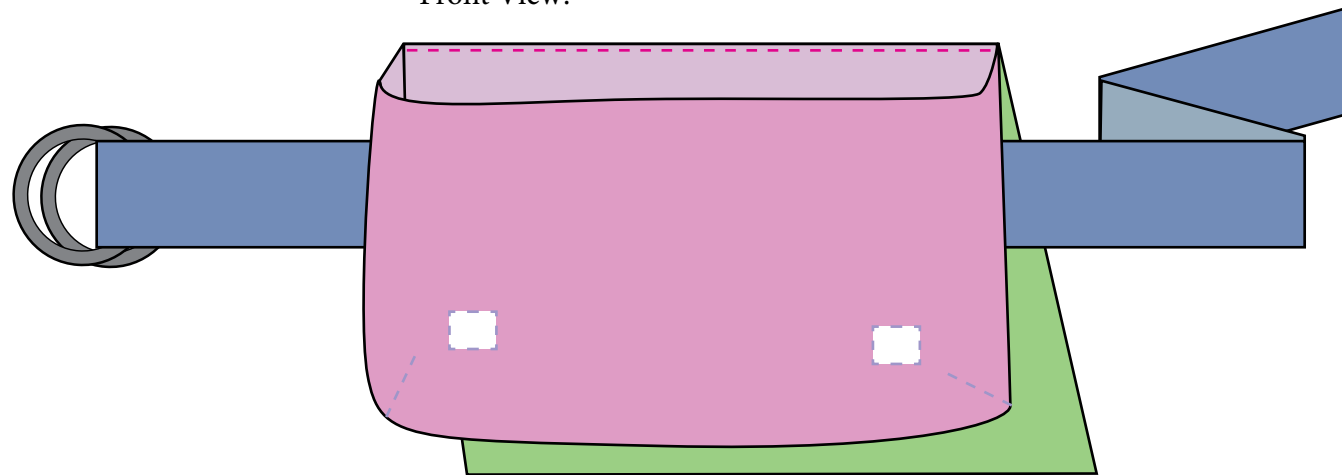

9) Place the **Body (outer) pouch**, **straps**, and **Flap** (still “open” and flat against **Body - Back [outer]**) all INSIDE of the still-inside-out **Body (liner) pouch**, making sure **Body Front (outer)** and **Body Front (liner)** are on the same side, and **Body Back (outer)**, **Flap**, and **Body Back (liner)** are on the other side. The **Flap** should be INSIDE of the **Liner**.

Pull the rings and most of the **long strap** through the hole at the bottom of **Body (liner)** to reduce bulk between the layers while you sew.

Carefully line up the side-seams of the **two pouches**, and pin the top edges all the way around. Sew along the top edge all the way around.

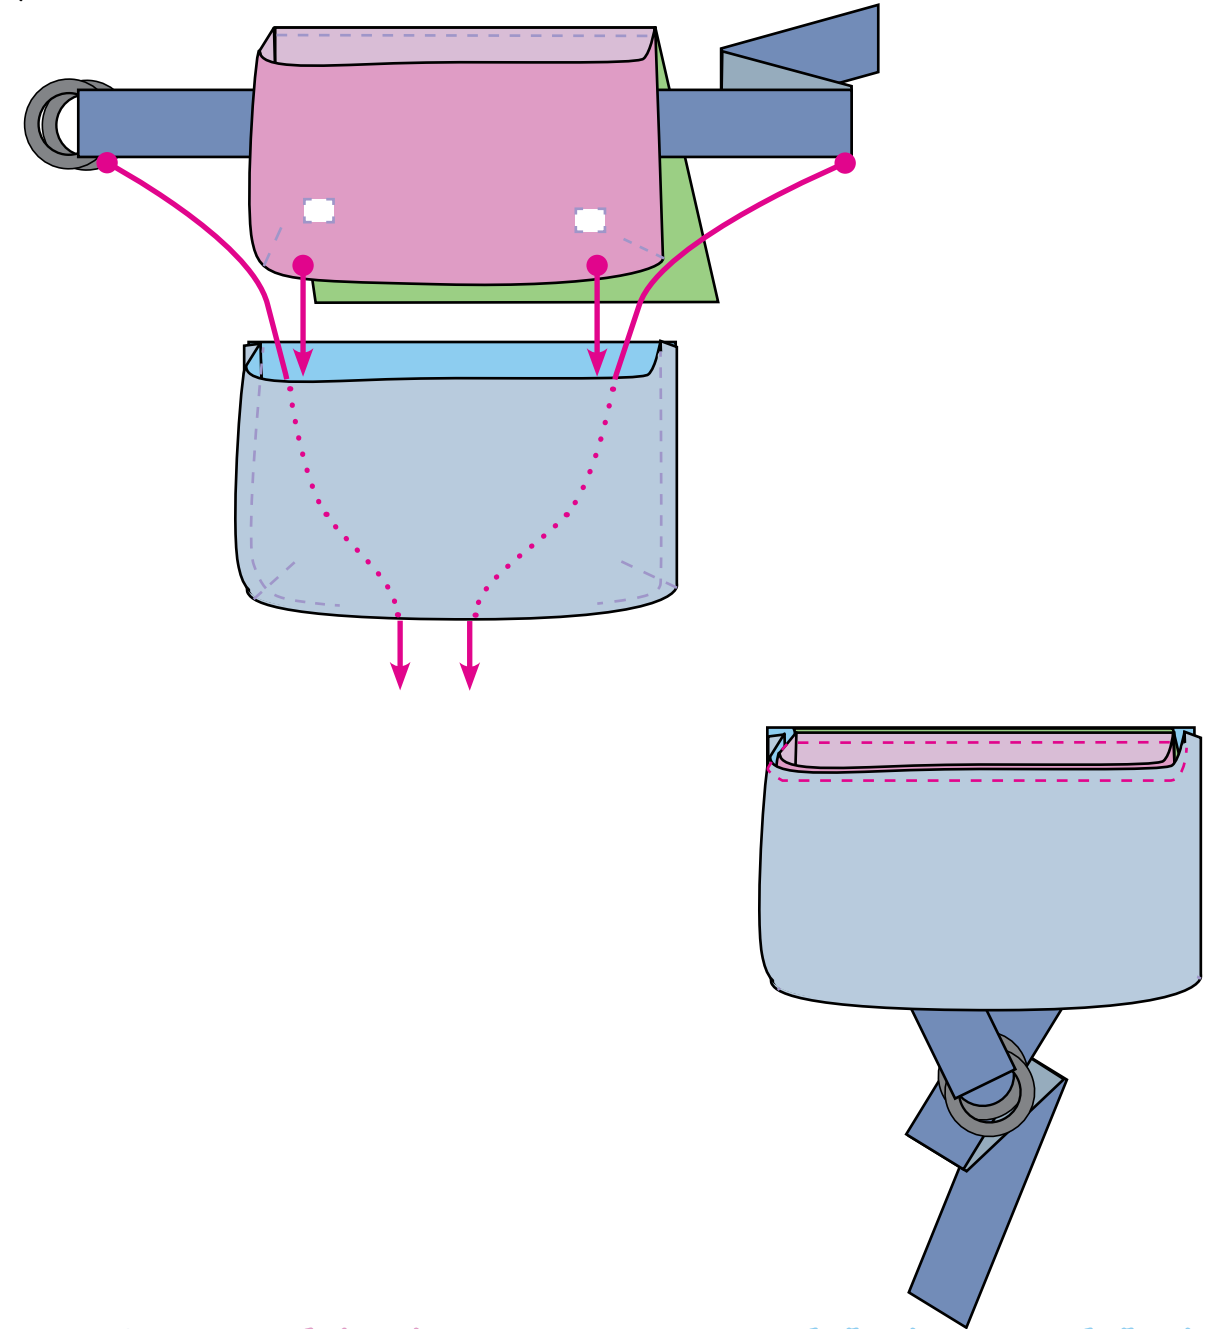

10) Pull the rest of the **Straps** and **Body (outer)** down through the hole of **Body (liner)**, turning **Body (liner)** right-side-out in the process. Fold the raw edges under of the hole at the bottom of **Body (liner)** and topstitch this hole closed. Tuck the **lining** down into **Body (outer)** and fold the **Flap** over the top so the clasps on the **Flap** meet and secure to the clasps on **Body - Front (outer)**.