


How To Make A Traditional X-Onbuhimo (with or without rings)

Tutorial by Alyssa Leonard - Original Carrier Concept by Leslie Kung

You Need:

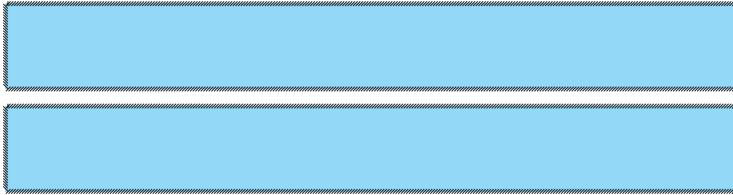

This fabric is:


without any stretch
thick like men's pants
natural fibers like cotton or linen
machine washable

Each strap is:

100 inches x 12 inches (6-18 months)
100 inches x 15 inches (18-36 months)

250 centimeters x 30 centimeters (6-18 months)
250 centimeters x 40 centimeters (18-36 months)

150 inches long or 375 centimeters long for plus size or fancy finishes



Sewing Machine



Thread


Regular All Purpose
100% Polyester



Sewing Machine Needle

Heavy Duty or Denim Needle

Optional:



2 small aluminum rings
2 inch inner diameter
5 centimeter inner diameter
weight tested, without seams

Symbols:



raw, unfinished edge



folded/finished edge




sew here



stitching from
previous steps

1)

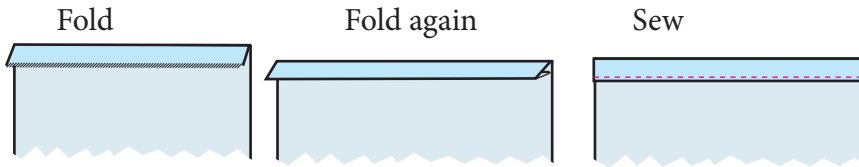


Hem all edges of both straps.

To hem:

- Fold edge over 1/4 inch or 1 centimeter.
- Press flat.
- Fold edge again 1/2 inch or 1.5 centimeters.
- Press flat.
- Sew along inside fold.

2)

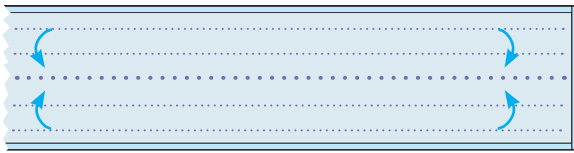

Cross section of folds:




Box pleat the end of each strap. To do so:

Along the last 12 inches (30 centimeters) mark fabric in half. Mark each half in thirds.

Fold top third down to half-way line. Fold bottom third up to half-way line. Press flat.

3)




For rings:

Measure 4 inches/10 centimeters from the end of each strap and sew a straight line across the pleats to keep them in place. Use a long stitch length, like a basting stitch.


For ringless/fabric loops:

Measure 6 inches/15 centimeters from the end of each strap and sew a straight line across the pleats to keep them in place. Use a long stitch length, like a basting stitch.

4)

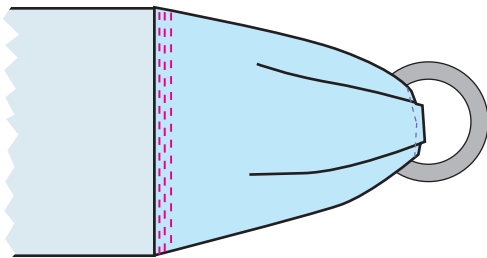

OR:

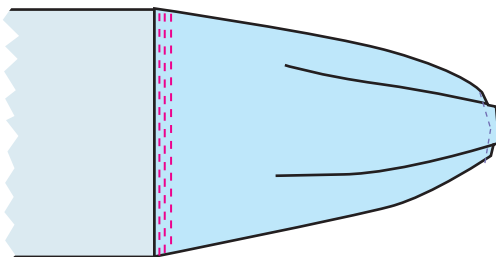

On each strap, fold the end of each strap wrong-sides-together along the line of stitching on the pleats. If using rings, thread one through the end of each strap so it is inside the fold.


Gently unfold the rest of the fabric so that only the folded end is pleated.

Sew 3 lines of stitching where the strap ends and overlaps with the long end of the strap.

5)

Cross the two straps at 90 degrees, with the edge of the loops (where the three lines of stitching from the previous step are) right at the edge of the square overlapped section.

Pin in place. Run stitches along the four edges of the square overlapped section, and then sew x-boxes in the 4 corners of the overlap.

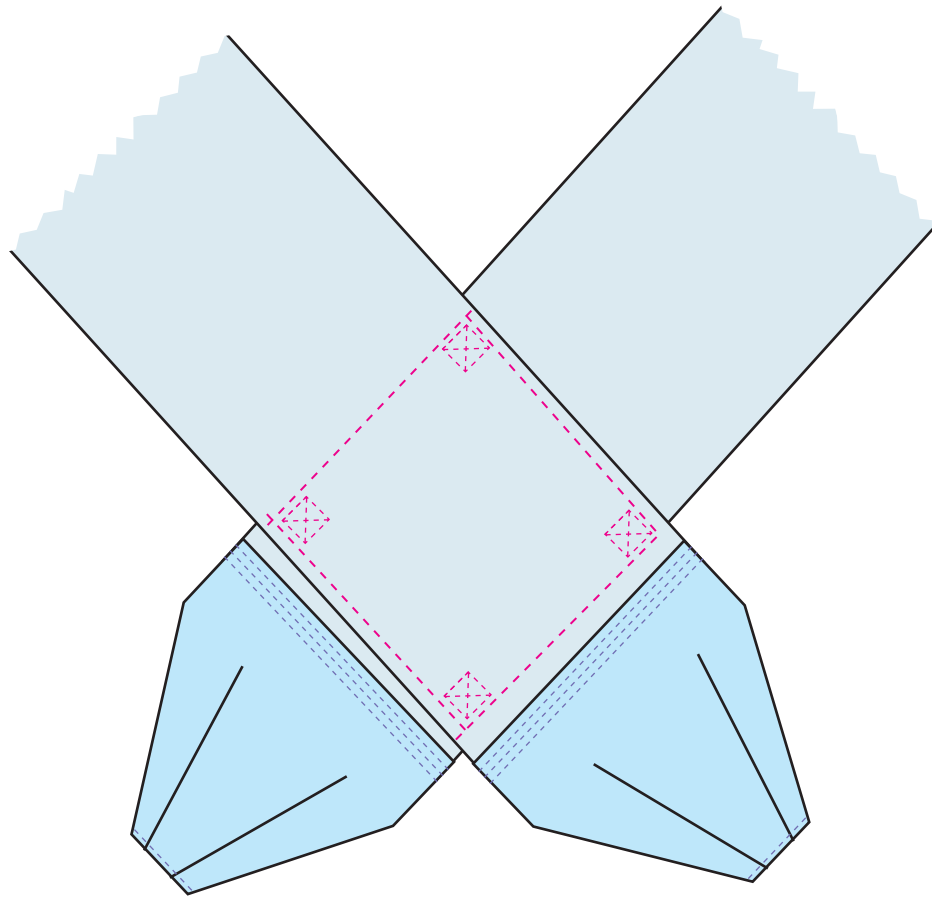

How to sew a 2 layer x box:

