


How To Make A Reverse X-Onbuhimo

Tutorial by Alyssa Leonard - Original Carrier Concept by Leslie Kung

You Need:

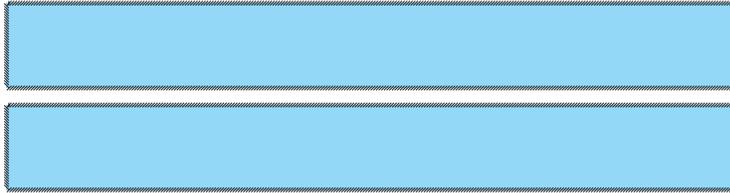

This fabric is:


without any stretch
thick like men's pants
natural fibers like cotton or linen
machine washable

Each strap is:

100 inches x 12 inches (6-18 months)
100 inches x 15 inches (18-36 months)

250 centimeters x 30 centimeters (6-18 months)
250 centimeters x 40 centimeters (18-36 months)

150 inches long or 375 centimeters long for plus size or fancy finishes



Sewing Machine




Thread

Regular All Purpose
100% Polyester



Sewing Machine Needle

Heavy Duty or Denim Needle



4 small aluminum rings

2 inch inner diameter

5 centimeter inner diameter

weight tested, without seams

Symbols:



raw, unfinished edge



folded/finished edge




sew here



stitching from
previous steps

1)

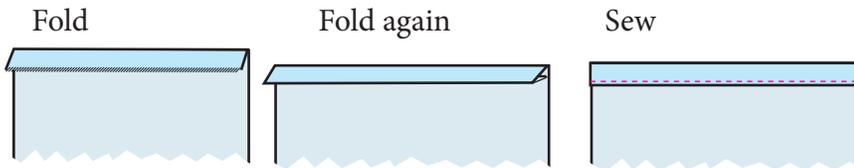


Hem all four edges of both straps.

To hem:

- Fold edge over 1/4 inch or 1 centimeter.
- Press flat.
- Fold edge again 1/2 inch or 1.5 centimeters.
- Press flat.
- Sew along inside fold.

2)

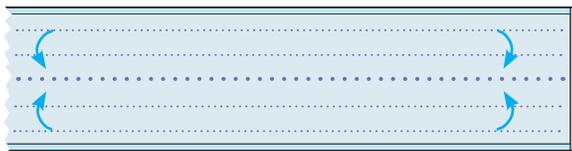

Cross section of folds:




Box pleat the end of each strap. To do so:

Along the last 30 inches (75 centimeters) mark fabric in half down the length. Mark each half in thirds.

Fold top third down to half-way line. Fold bottom third up to half-way line. Press flat.

3)



For average/medium size wearers:

Measure 13 inches/33 centimeters from the end of each strap and sew a straight line across the pleats to keep them in place. Use a long stitch length, like a basting stitch.


For extra small size wearers:

Measure 11 inches/28 centimeters from the end of each strap and sew a straight line across the pleats to keep them in place. Use a long stitch length, like a basting stitch.

For plus size or broad-shouldered wearers:

Measure 15 inches/38 centimeters from the end of each strap and sew a straight line across the pleats to keep them in place. Use a long stitch length, like a basting stitch.

4)

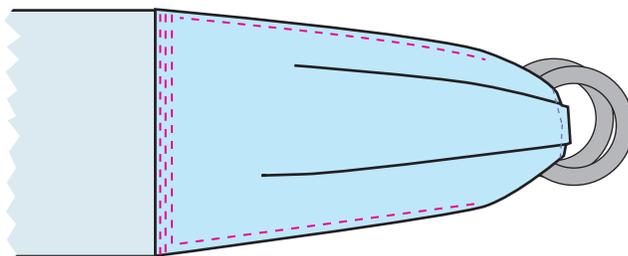

On each strap, fold the end of each strap wrong-sides-together along the line of stitching on the pleats. Thread two rings through the end of each strap so they are inside the fold.

Gently unfold the rest of the fabric so only the folded edge is pleated.


Sew 3 lines of stitching where the strap ends and overlaps with the long end of the strap.

Sew the open edges of the sides closed to keep the rings from floating around in the open space.

5)

Cross the two straps at 90 degrees, with the edge of the loops (where the three parallel lines of stitching from the previous step are) right at the edge of where the two straps overlap.

Pin in place. Stitch along the four edges of the square overlapped section, and then sew x-boxes in the 4 corners of the overlap.

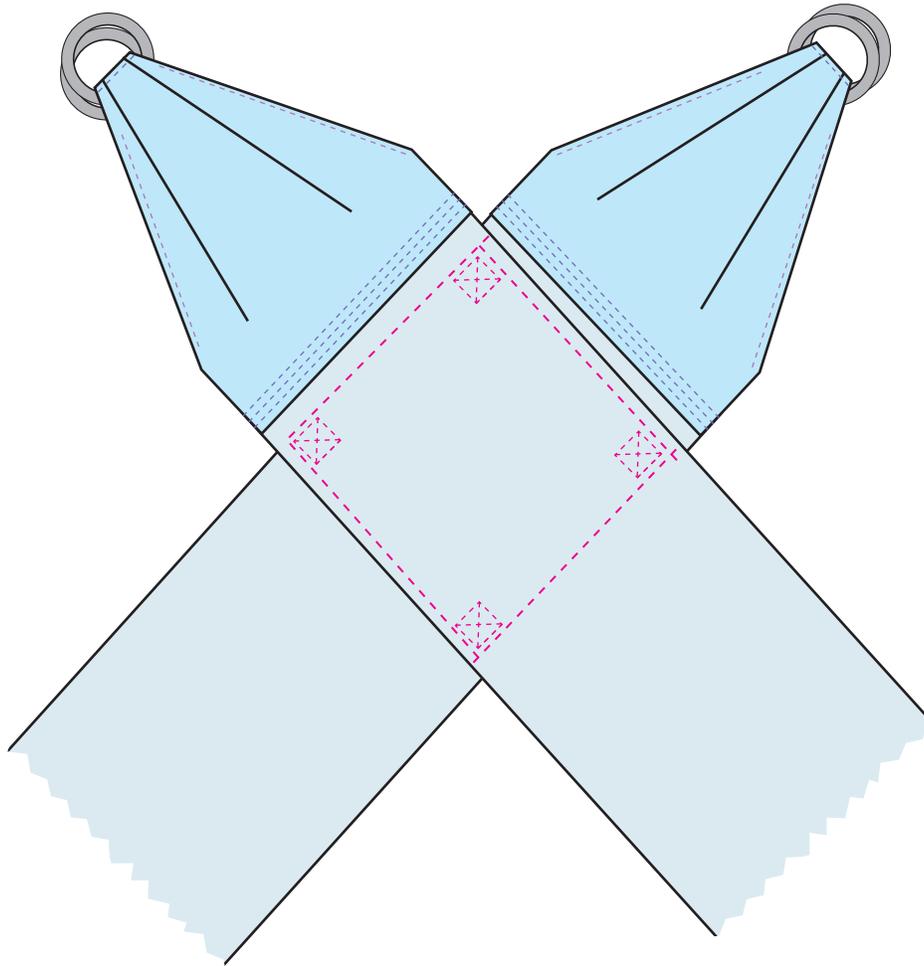

How to sew a 2 layer x box:

